


Fuel Boost Pumps

Features

- SFAR 88 Compliant
- AC Induction motor driven centrifugal pump
- Fully qualified for aircraft service
- 115 VAC, 3-phase, 400 Hz input power
- Fuel cooled motor - no supplemental cooling is needed
- Fuel lubricated bearings - no supplemental lubrication is needed
- Direct-drive between the motor and the pump's impeller - no shaft seal
- Explosion suppression housing (meets NAVAIR HDBK 06-5-504)
- Qualified for a minimum of 1,000 hours of Dry Running at altitude pressures up to 60,000 feet and 160°F - verified by repeated tests
- Non-resettable thermal fuses provide a last-defense safety shutdown
- Bottom tank mounted or through-the-tank mounting versions available




Basic Dimensions

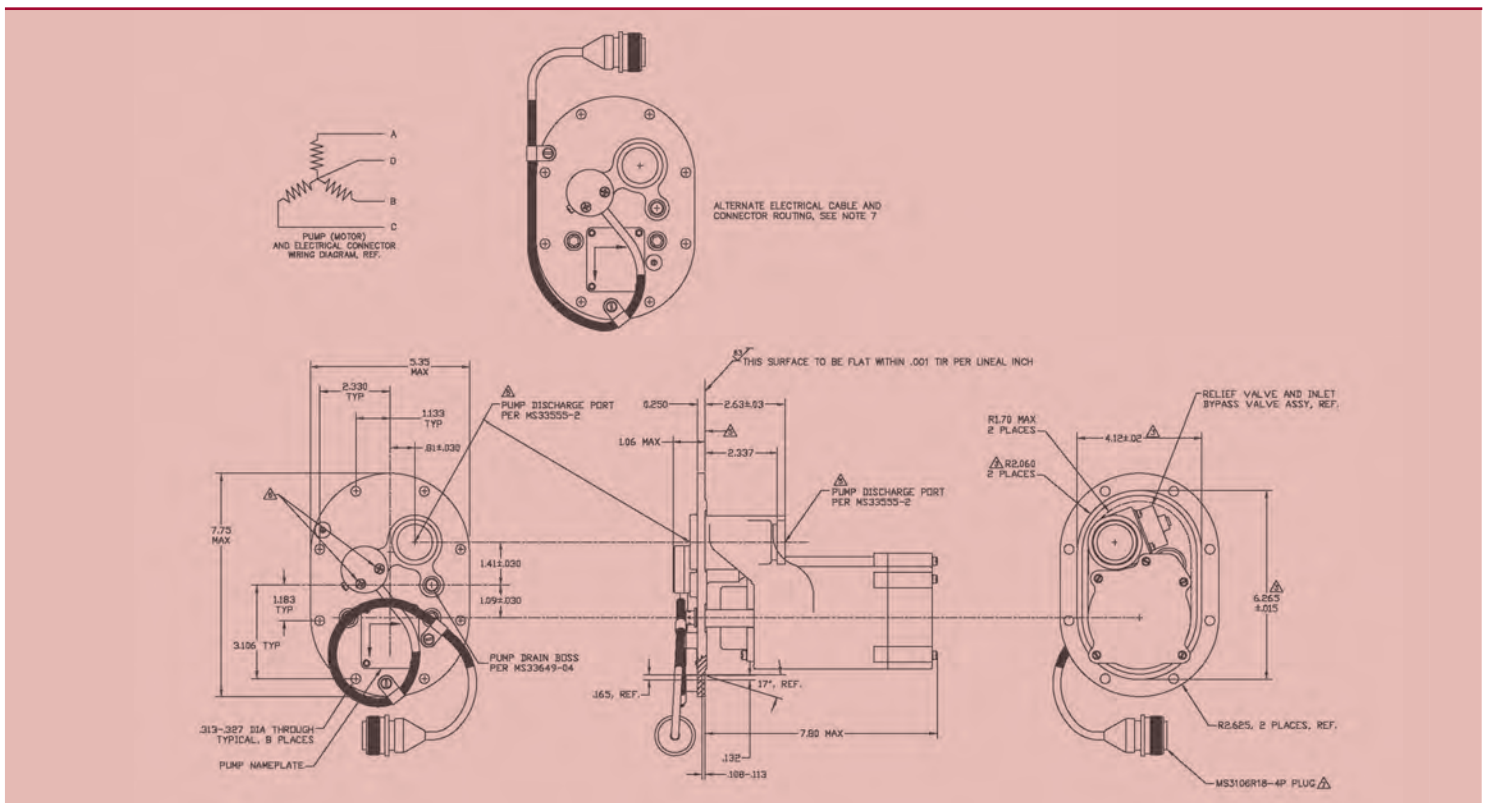

Fuel Boost Pumps

Nominal Performance

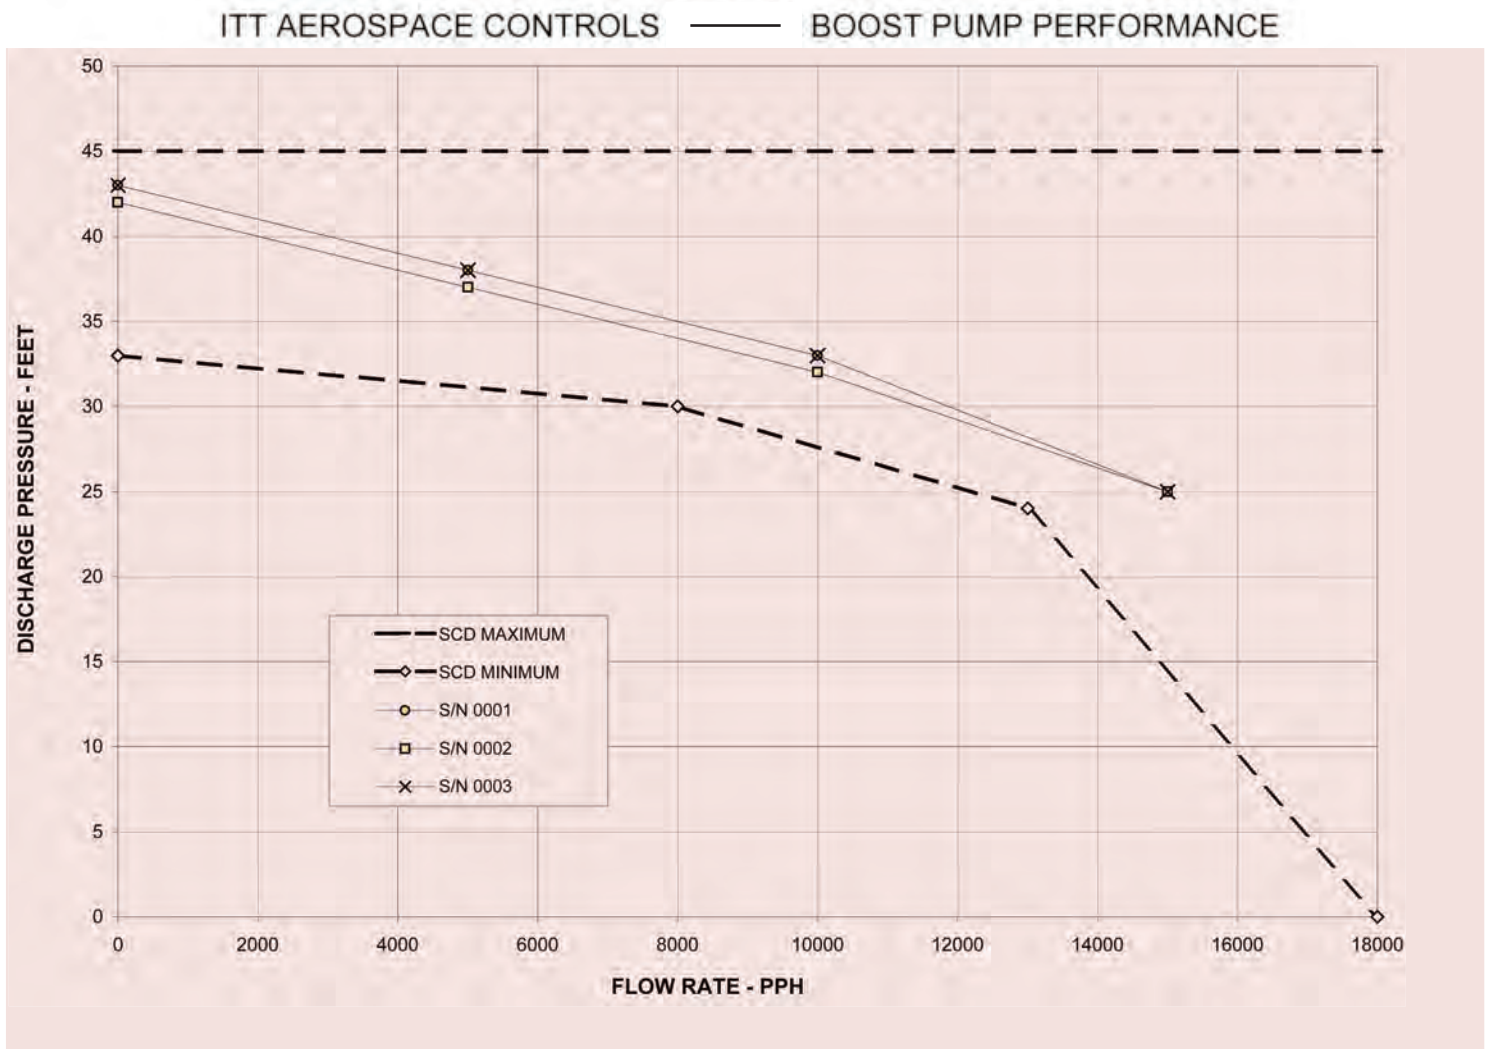

ITT Aerospace Controls
28150 Industry Drive
Valencia, CA 91355
tel: 661 295-4000
www.ittaerospace.com

For business enquiries in India, please contact:

ITT Corporation India Private Limited
201, Pentagon Tower 2
Magarpatta City, Hadapsar
Pune – 411013
Maharashtra, India
Tel.: +91 20 39 150000
Fax: +91 20 39 150006
Email: indiasales.ct@itt.com
www.ittindia.in/Business/Control-Technologies/